

# Model HVF 410HD

## Oil Indirect Fired Heater

# CLEAN DRY HEAT!



### *With Heavy-Duty Construction*

- Dual output controls  
High - 412,000 BTU, Low - 272,000 BTU
- Extra large fuel tank, 57 gallons
- Continuous run time over 30 hrs on low  
(20 hours on high)
- Ductable up to 60'
- Capable of recirculation operation  
for improved fuel savings
- Preheated fuel filter for reliable cold starting

# heat wagon

# NEW FOR 2010



*sold  
exclusively by*

# heat wagon

### SPECIFICATIONS

Input	412,000 BTU/Hr (High) 272,000 BTU/Hr (Low)
Fuel	#1 or #2 Diesel, Kerosene, JP-8, Jet A
Fuel Consumption	2.89/1.86 GPH
Electrical	120 Volts 20 amp circuit
Fan	3250 CFM
Thermostat	Standard On/Off
Temp Rise	140°F @ 0°F Ambient (High) 105°F @ 0°F Ambient (Low)
Heat Output	354,000 BTU/Hr (High) 231,000 BTU/Hr (Low)
Flue Diameter	6"
Duct Size	20" with single outlet 16" with dual outlet
Dimensions	83"L x 33"W x 48"H
Weight	507 lbs.

# heat wagon

Rev. 6-10

342 N. Co. Rd. 400 E. Valparaiso, IN 46383  
888-432-8924 • 219-462-7985 • [www.heatwagon.com](http://www.heatwagon.com)


## Standard Features



Single Lift Point Bracket




Preheated Fuel Filter



Fork Lift Pockets

## Recirculation Mode

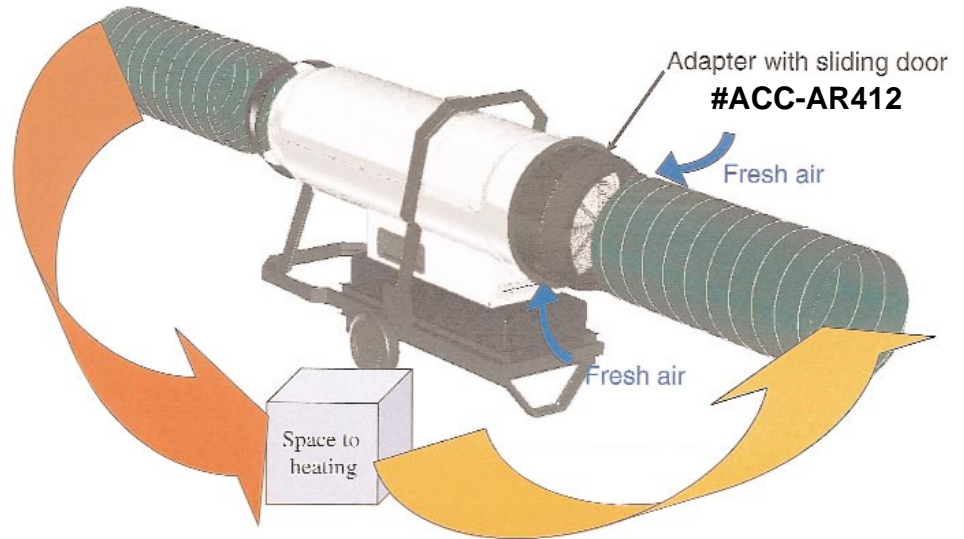

## Optional Accessories



Remote Thermostat  
(with 50' cord)  
#ACC-THIDF



External Fuel Kit  
(allows access to external fuel source)  
#ACC-TK300



Flue Duct Kit  
(with rain cap)  
#EF1



Single Outlet Adaptor  
#AR401



Duct  
20" x 25' for single outlet  
#WD2025  
18" x 25' for 2-way outlet  
#WD1825



2-way Outlet Adaptor  
#AR402