




Model 950H

Direct Fired Heater

Component upgrades virtually eliminate electrical service calls

- Efficient motor reduces amp draw and is rated to run on standard 15 amp circuit
- New remote (50' long) thermostat with Hi/Lo/Off control
- 12" wheels make for easy handling
- Relays pull in and hold tight down to 95V.
- Ductable up to 100 ft.
- Upgraded heater control board . . .
 - starts heater with low voltage down to 95V
 - potted control board minimizes moisture and vibration
- Diagnostic troubleshooting lights

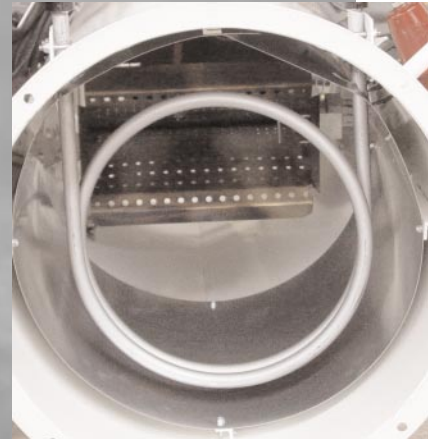

Model 950HL available as liquid withdrawal unit.



SPECIFICATIONS

Input	950,000 - 400,000 BTU/Hr
Fuel	Vapor Propane/Natural Gas
Gas Consumption	10.4 GPH Propane/950 CFH NG
Gas Connection	1-1/4" FNPT
Electrical	120 Volts 15 amp circuit
Fan	7200 CFM 1-1/2 HP
Thermostat	2 Stage Hi/Lo/Off w/50' Remote
Temp Rise	250°F
Actual Dimensions	39"H x 73"L x 30.5"W
Weight	325 lbs.



Gas Supply:

	Inlet Pressure	
	Min PSI	Max PSI
Propane	1	10
Natural	3	10

(Minimum inlet pressure is for purpose of input adjustment)



Rev. 1-10

342 N. Co. Rd. 400 E. Valparaiso, IN 46383
219-464-8818 • 219-462-7985 • www.heatwagon.com