


Model 950HS

Direct Fired Heater

Component upgrades virtually eliminate electrical service calls

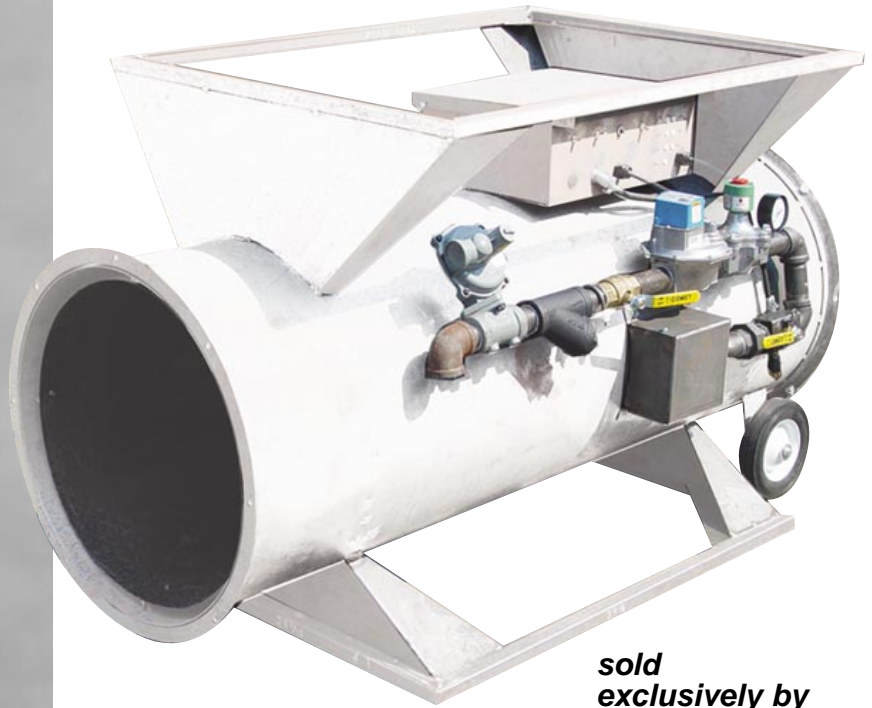

sold exclusively by
heat wagon

- Efficient motor reduces amp draw and is rated to run on standard 15 amp circuit.
- New remote (50' long) thermostat with Hi/Lo/Off control.
- Stackable design
- Relays pull in and hold tight down to 95V.
- Ductable up to 125 ft.
- Upgraded heater control board . . .
 - starts heater with low voltage down to 95V
 - potted control board minimizes moisture and vibration
- Diagnostic troubleshooting lights



LED Status Lights facilitate quick service calls.

SPECIFICATIONS	
Input	950,000 - 400,000 BTU/Hr
Fuel	Vapor Propane/Natural Gas
Gas Consumption	10.4 GPH Propane/950 CFH NG
Gas Connection	1-1/4" FNPT
Electrical	120 Volts 15 amp circuit
Fan	7200 CFM 1-1/2 HP
Thermostat	2 Stage Hi/Lo/Off w/50' Remote
Temp Rise	250°F
Weight	325 lbs.

Certified (Pending)

Gas Supply:	Inlet Pressure
	Min PSI
Propane	3
Natural	3

(Minimum inlet pressure is for purpose of input adjustment)

heat wagon

342 N. Co. Rd. 400 E. Valparaiso, IN 46383
 219-464-8818 • 219-462-7985 • www.heatwagon.com

Model 950H

Direct Fired Heater

Component upgrades virtually eliminate electrical service calls



sold exclusively by



- Efficient motor reduces amp draw and is rated to run on standard 15 amp circuit.
- New remote (50' long) thermostat with Hi/Lo/Off control.
- 12" wheels make for easy handling
- Relays pull in and hold tight down to 95V.
- Ductable up to 125 ft.
- Upgraded heater control board . . .
 - starts heater with low voltage down to 95V
 - potted control board minimizes moisture and vibration
- Diagnostic troubleshooting lights



LED Status Lights facilitate quick service calls.

SPECIFICATIONS

Input	950,000 - 400,000 BTU/Hr
Fuel	Vapor Propane/Natural Gas
Gas Consumption	10.4 GPH Propane/950 CFH NG
Gas Connection	1-1/4" FNPT
Electrical	120 Volts 15 amp circuit
Fan	7200 CFM 1-1/2 HP
Thermostat	2 Stage Hi/Lo/Off w/50' Remote
Temp Rise	250°F
Weight	325 lbs.



**Certified
(Pending)**

Gas Supply:	<u>Inlet Pressure</u>
	Min PSI
Propane	3
Natural	3

(Minimum inlet pressure is for purpose of input adjustment)



342 N. Co. Rd. 400 E. Valparaiso, IN 46383
219-464-8818 • 219-462-7985 • www.heatwagon.com