


# heat wagon




342 N. Co. Rd. 400 East  
Valparaiso, IN 46383

219-464-8818 • 888-432-8924 • Fax 800-255-7985

## Model S2200

### SPECIFICATIONS

Input .....	2,200,000 BTU/Hi Fire	
	950,000 BTU/Lo Fire	
Fuel .....	Vapor Propane, Natural Gas	
Inlet Pressure .....	Max W.C.	Min W.C.
Propane .....	15" w.c.	10" w.c.
Natural Gas .....	15" w.c.	10" w.c.
Manifold Pressure .....	Propane	1.4" w.c.
	Natural Gas	6.4" w.c.
Gas Consumption .....	24	GPH LP
	2200	CFH NG
Gas Connection .....	1 1/4" NPT LP	
	1 1/2" NPT NG	
Electrical Requirements .....	1Ø 230 Volts 30 Amp	
	3Ø 208-230 Volts 20 Amp	
	3Ø 460 Volts 10 Amp	
Fan .....	10500 CFM 5 HP 3" SP	
	Belt Drive Impeller	
Thermostat .....	HI-LO or Modulating	
Temp Rise .....	390°F High 250°F Lo	
Dimension .....	96"L x 44"W x 53"H	
Approximate Weight .....	800 lbs.	

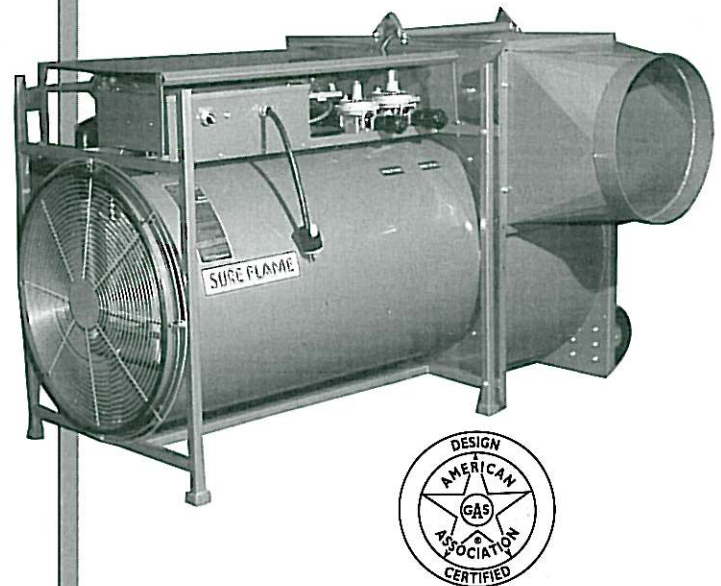

**Propane & Natural Gas  
Portable Space Heater**

### Features

- AGA Certified
- Air flow switch
- Burner heat shield
- Dual fuel
- Ductable
- Flame safeguard control
  
- Hi limit switch
- Motor overload - manual reset
- Remote mounted thermostat
- Weather sealed control box

### Benefits

- Tested to ANSI standard Z83.7 (1990)
- Safe fuel shutdown if combustion air is interrupted
- Low housing temperature
- Simple inlet change from propane to natural gas
- May be ducted up to 300 feet
- Safe monitoring of combustion, two trial electronic ignition with 5 second pre-purge time delay and 10 second shutdown
- Protects heater by shutting down if unit is being overfired
- Protects heater by shutting down if voltage is too low
- Automatically cycles the heater hi/low to maintain room temperature
- Indoor/outdoor usage

[www.heatwagon.com](http://www.heatwagon.com)