


EZ clean,  
dent resistant  
poly shell

**Unique venturi  
design produces  
15,300 CFM**




Multi-position  
tilt adjustment

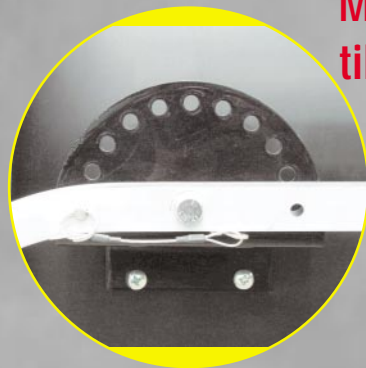


"Recessed"  
pneumatic tires



Convenient  
cord wrap

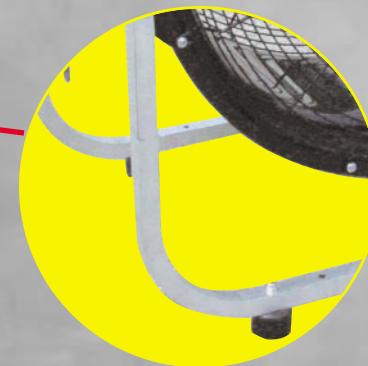

Heavy-duty  
aluminum  
frame

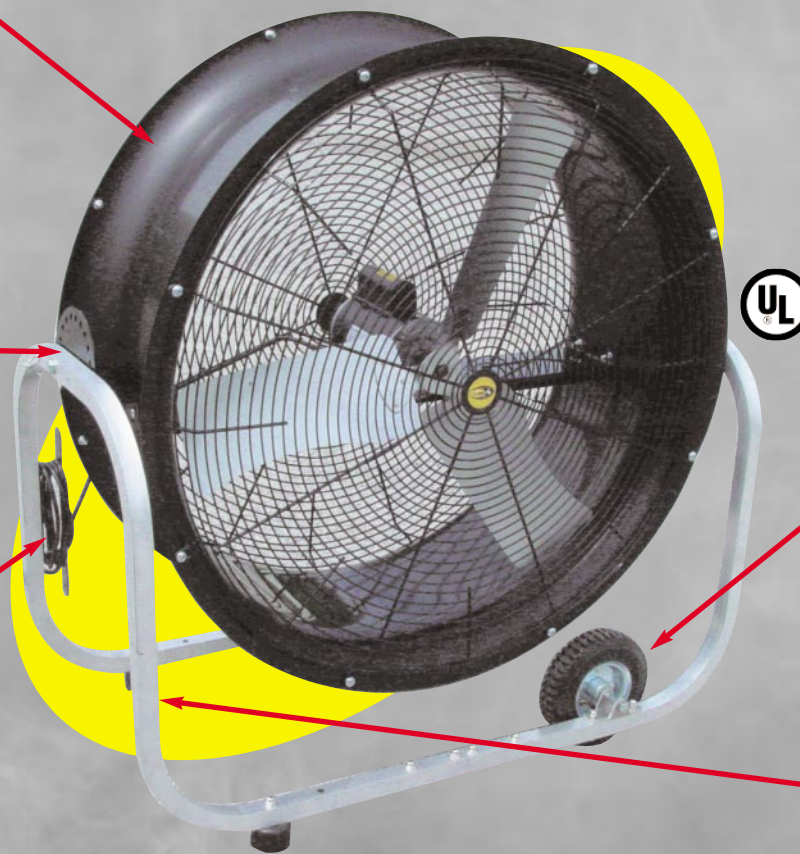

Model PF-36



**heat wagon**

342 N. Co. Rd. 400 E. Valparaiso, IN 46383 • 219-464-8818 • 219-462-7985 • [www.heatwagon.com](http://www.heatwagon.com)

# Model PF-36



## 36" Poly Shell Fan

- 15,300 CFM with 1/2 HP motor creates an air pattern unequalled in today's market
- Unique OSHA approved guard creates less air restriction
- One piece polyethylene housing with UV inhibitors, no rust, easy to clean and no corners for disease build-up
- Totally enclosed, maintenance free, direct drive high efficiency motor has completely sealed ball bearings
- Multi adjustment bracket allows you to tilt and lock the fan angle on both sides
- UL and ULC certification



### SPECIFICATIONS

Size	36"
Motor	1/2 HP, 115 V, 1 Phs., 1 Speed
Amps	6.0
CFM	15,300
Noise DB	61
RPM	825
Drive	Direct Drive
Blade	3 Galvanized
Color	Black
Approx. Weight	105 lbs.

### Airflow Pattern

