SAFE TOUGH RELIABLE

NEW for 2014

IX800

High Capacity, Indirect Fired Heater

SURE FLAME®

1-800-661-1162 www.sureflame.ca info@sureflame.ca

IX800

800,000 BTU/HR

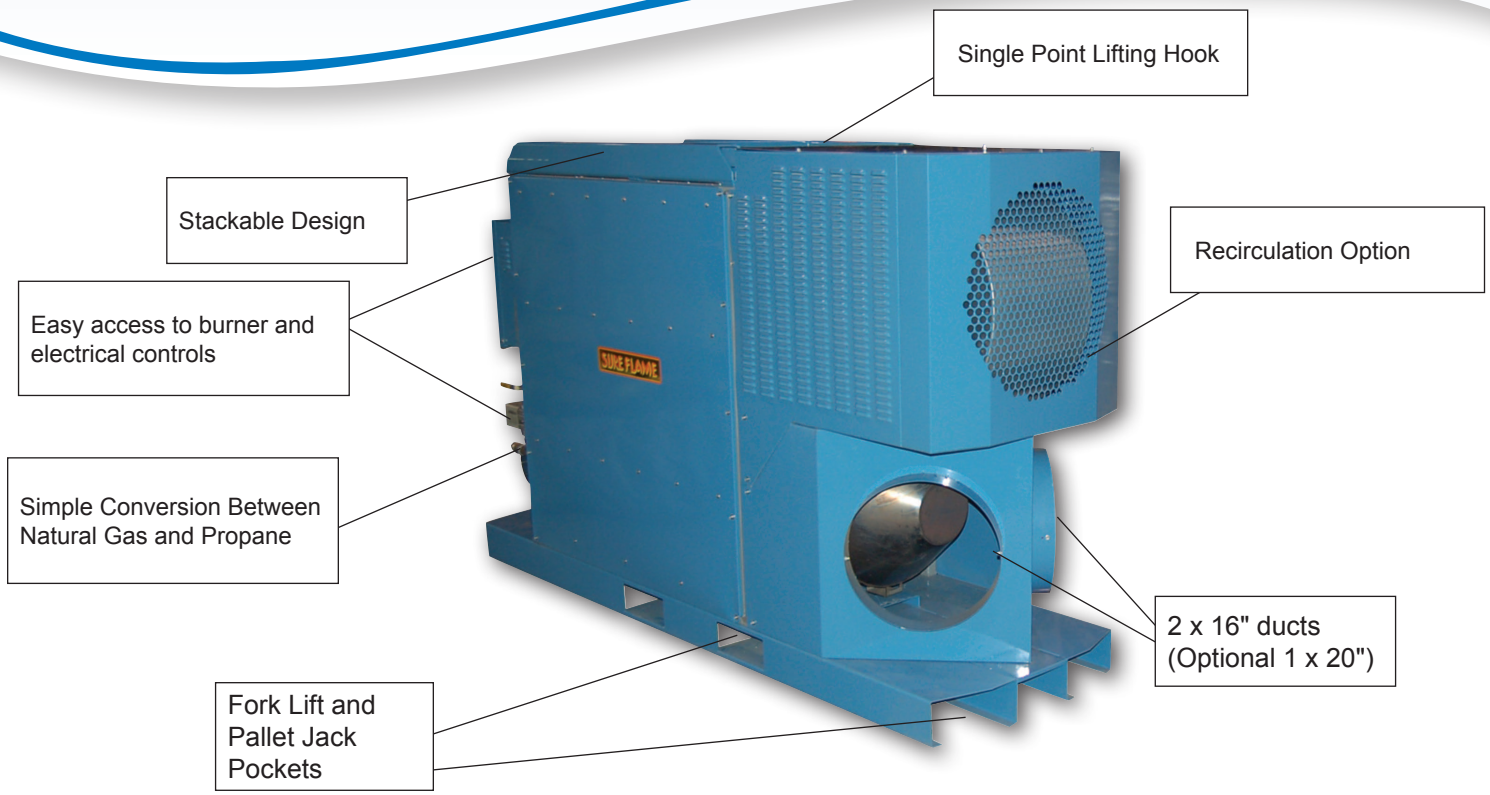

FEATURES

- Accepts both 1-phase and 3-phase electrical input as standard feature
- Patented high-efficiency 304 stainless steel heat exchanger
- Single switch control for convenient simple operation
- VFD "Soft Start" control provides smooth startup with lower amp draw
- Remote thermostat
- Compact Design - Uses less space on job site and during off season storage.

SPECIFICATIONS

	IX 800
HEAT INPUT	800,000 BTU/hr
HEATER EFFICIENCY	86 %
APPROX. FUEL CONSUMPTION	
Propane	33 l/hr
	36.9 lbs/hr
Natural Gas	800 CFH
FAN RATING	13,600* CFM
AIR FLOW (at 90 °C)	6,000 CFM
HEAT RISE	72 / 130 °C/°F
POWER	7.5HP 208/230V
	1-Phase or 3-Phase
THERMOSTAT RANGE	4 to 38 °C
OUTLET DIAMETER	2 x 16" or 1 x 20"
MAX DUCT LENGTH	100'
FLUE CONNECTION	10"
DIMENSIONS (LxWxH)	95" x 29" x 58"
WEIGHT	1660 Lbs
GAS CONNECTION	1" NPT
GAS SUPPLY PRESSURE	1/2 to 5 PSI

*Actual output will depend on operating conditions

For more information Please contact us at 800.661.1162 info@sureflame.ca

Our quality products are sold throughout North America by selected distributors whose integrity and product knowledge qualifies them to assist you in your selection of Sure Flame Heaters and Air Movers. SURE FLAME PRODUCTS is a division of HAUL-ALL EQUIPMENT LTD.