



# Model 1800B



## Direct Fired Heater

**Component upgrades virtually eliminate electrical service calls**

- Efficient motor reduces amp draw and is rated to run on standard 15 amp circuit
- New remote (50' long) thermostat with Hi/Lo/Off control
- 12" wheels make for easy handling
- Relays pull in and hold tight down to 95V
- Ductable up to 50 ft.
- Upgraded heater control board . . .
  - starts heater with low voltage down to 95V
  - potted control board minimizes moisture and vibration
- Diagnostic troubleshooting lights



**Model 1800BL available as liquid withdrawal unit.**

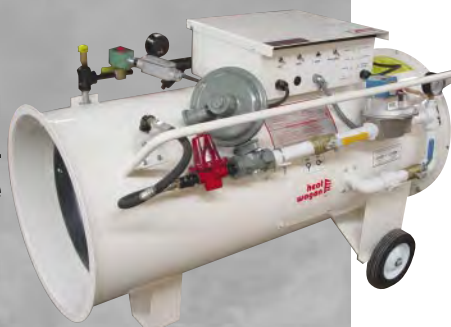

### SPECIFICATIONS

Input	750,000 - 450,000 BTU/Hr
Fuel	Vapor Propane/Natural Gas
Gas Consumption	8.3 GPH Propane/750 CFH NG
Gas Connection	3/4" FNPT
Electrical	120 Volts 15 amp circuit
Fan	4200 CFM 1 HP
Thermostat	2 Stage Hi/Lo/Off w/50' Remote
Temp Rise	385°F
Actual Dimensions	31.5"H x 48.5"L x 26"W
Weight	200 lbs.



Gas Supply:	Inlet Pressure	
	Min PSI	Max PSI
Propane	2	10
Natural	2	10

(Minimum inlet pressure is for purpose of input adjustment)



Rev. 1-10

342 N. Co. Rd. 400 E. Valparaiso, IN 46383  
219-464-8818 • 219-462-7985 • www.heatwagon.com