

**Model
DG250
DG400**

Ductable Dual Fuel Heater

*Perfect For
Tent Applications*

*No Open Flame!
No Problem!*

- Heavy-duty frame with wheels and lifting hook
- Changes from vapor propane to natural gas with a turn of a valve
- Low amp draw (5.0/8.5)
- Ductable up to 50'
- High CFM axial fan
- Air switch protected by 30 mesh filter
- Remote thermostat with 50' of cord (optional)
- Capable of continuous ventilation with thermostat control of heat
- See reverse side optional accessories

heat wagon 



SPECIFICATIONS

Model:	DG250	DG400
Heat Input Btu/Hr	241,000/255,000	394,000/404,000
Fuel	Vapor Propane/Natural Gas	Vapor Propane/Natural Gas
Output (CFM)	2766	4120
Gas Consumption	2.6 GPH LP, 255 CFH NG	4.3 GPH LP, 404 CFH NG
Power Supply	120V, 5 amp	120V, 8 amp
Thermostat	On/Off	On/Off
Duct	50' (WD1625HT5)	50' (WD2025HT5)
Weight lbs.	139	233
Heater Dimensions	45"L x 31"W x 36"H	61"L x 34"W x 39"H

heat wagon 


Rev. 2-18

342 N. 400 E. Valparaiso, IN 46383
219-464-8818 • 219-462-7985 • www.heatwagon.com

Optional Accessories




Digital Thermostat (with 50' cord)
Set Point Range: -30°F - 220°F
Differential Range: 1° - 30°F
#ACC-DIGTHIDF

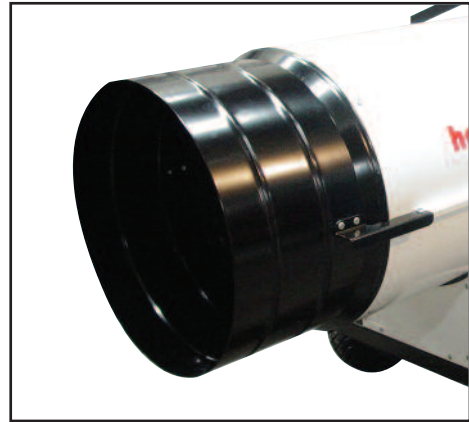

Duct Adapter for DG250
#ACC-AR250

Duct Adapter for DG400
#ACC-AR400

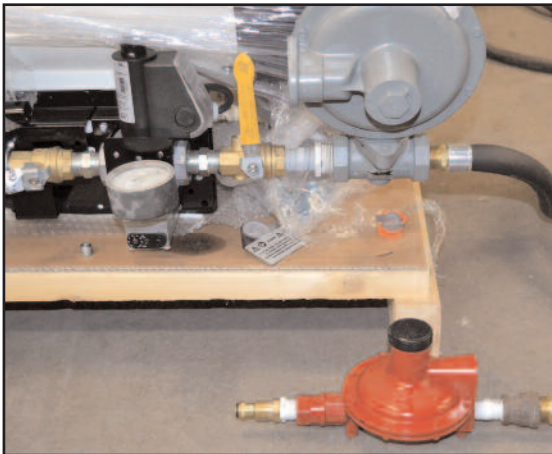

LP Hose and Regulator Installation Kit

Includes all the hardware needed for installing your heater to a vapor propane tank. It includes: POL fitting, high pressure regulator (reduces propane tank pressure to 10PSI), fittings for connecting regulator to 25' of 3/4" hose (CSA listed for propane and natural gas), second stage regulator (reduces line pressure of 10PSI to 9-14" water column outlet pressure), and 3/4" MNPT nipple for connection to heater, teflon tape also included.

#ACC-INSTKIT